



Mod. C2M

DISPOSITIVO DI
COMANDO A DUE MANI

*TWO HANDS CONTROL
DEVICE*



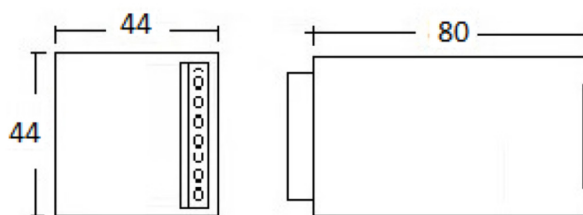
 
CARATTERISTICHE
TECNICHE

Bassa Tensione sui pulsanti	12V
Requisito di contemporaneità	0,3 – 0,5 sec.
Categoria di sicurezza	EN 574 (Type III A)
Connessioni	Con morsetti estraibili a vite
Numero contatti in uscita	1 N.A. (5A 240 VAC)
Alimentazione	24vdc; 24vac; 115vac; 230vac
Custodia	In ABS (resistenza termica 0 +60°C)
Ingombri (mm)	44 x 44 x 80
Montaggio	Supporto per guida OMEGA
Potenza nominale	1,5 VA
Temperatura di lavoro	-15 + 50°C

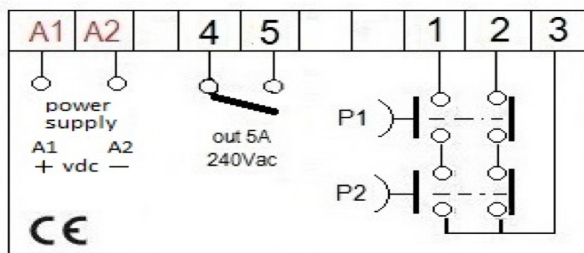

TECHNICAL FEATURES

Low voltage on buttons	12V
Inputs synchronization time	0,3 – 0,5 sec.
Safety standards	EN 574 (Type III A)
Connections	Plug-in screw terminal
Number of AUX outputs	1 N.O. (5A 240 VAC)
Power supply	24vdc; 24vac; 115vac; 230vac
Framework	ABS box; thermal resistance: 0 +60°C
Overall dimensions (mm)	44 x 44 x 80
Fitting design	DIN rail
Electrical absorption	1,5 VA
Working temperature	-15 + 50°C

**DIMENSIONI
ED INGOMBRI
OVERALL
DIMENSIONS**



**COLLEGAMENTI
ELETTRICI
ELECTRICAL
CONNECTIONS**



**ES. CODICI PER ORDINE
EX. ORDER CODES**

C2M	?
	ALIMENTAZIONE / POWER SUPPLY
	24 VDC
	24 VAC
	115 VAC
	230 VAC